



SIPHON RETAIL SPOT

25, 35 watt LED area luminaire
IP20 | 15°, 24°, 36°, 60° Beam Angle | Recessed
Mount

Application

A solution for Commercial, Retail, Industrial,
Education and Hospitality areas.

Features

- Frequency: 50/60Hz
- Luminaire Efficacy: 140lm/W
- Power Consumption: 25W|35W
- Rated Voltage: AC220-240V
- CCT: 3000K | 4000K | 5000kK
- ≥ 0.9 Power Factor
- LED Type: COB
- Driver: Tridonic/Vossloh Schwabe/Meanwell
- Unified Glare Rate: >19
- SDCM ≤ 5
- Electrical Class II
- Rotation: 360° Horizontally | 90° Vertically
- Surge Protection: 1.5KV
- Lumen Maintenance: L80 B10 50 000hrs
- Operational Lifespan: 50 000hrs


Design Specifications

- Housing Body: Die Cast Aluminium .
- Diffuser: UV Resistant Polycarbonate Lens .
- Housing Colour: White RAL9016
- 2.5"PC; 4"/6"/8"Aluminum 1090 Optics

Performance



Dimensions

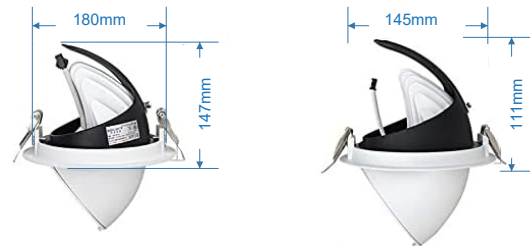

Rotation



Model No.	Dimensions (mm)	Power	Efficacy lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
SRS00101	Ø145*111	25W	140	4000K	>80	15° 24° 36° 60°	>19	≤5
SRS00102	Ø180*147	35W	140	4000K	>80	5° 24° 36° 60°	>19	≤5

SIPHON RETAIL SPOT



Certifications



Optional Features

- Triac | 0-10V | DALI Dimmable Options
- Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 10 500 9150