



SIPHON RETAIL SPOT

25, 35 watt LED area luminaire
 IP20 | 15°, 24°, 36°, 60° Beam Angle | Recessed Mount

Application

A solution for Commercial, Retail, Industrial, Education and Hospitality areas.

Features

- 50/60Hz Frequency
- 140lm/W Luminaire Efficacy
- 25W|35W Power Consumption
- AC220-240V Rated Voltage
- 3000k-4000k-5000k CCT
- ≥0.9 Power Factor
- COB LED Type
- Tridonic/Vossloh Schwabe/Meanwell Driver
- >UGR19
- SDCM ≤5
- Electrical Class II
- 350 degrees rotate horizontally
- 90 degrees rotate vertically
- 1.5KV Surge Protection
- L80 B10 50 000hrs Rating
- 50 000hrs lifespan


Design Specifications

- Die Cast Aluminium Housing Body.
- UV Resistant Polycarbonate Lens Diffuser.
- White RAL9016 Housing Colour
- 2.5*PC; 4*/6*/8*Aluminum 1090 Optics
- High uniformity ratio.
- Low glare ratio
- Flicker Free.

Performance



Dimensions

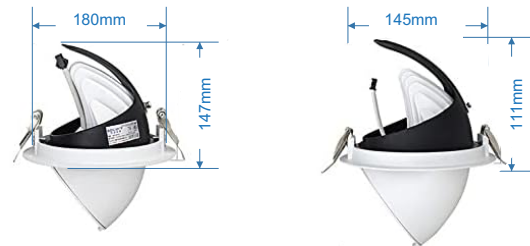

Rotation



Model No.	Dimensions (mm)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
SRS00101	Ø145*111	25W	140	4000K	>80	15° 24° 36° 60°	19	≤5
SRS00102	Ø180*147	35W	140	4000K	>80	5° 24° 36° 60°	19	≤5

SIPHON RETAIL SPOT



Certifications



Optional Features

- Triac | 0-10V | DALI Dimmable Options
- Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 11 486 3552