



## LAMONE BATTEN

36 watt LED area luminaire  
IP65 | 160° Beam Angle | Surface, Suspended  
and LinkableMount

### Application

A solution for industrial, commercial, retail, and Hospitality areas.

### Features

- 50/60Hz Frequency
- AC100-265V Rated Voltage
- 3000k-4000k-5000k CCT
- $\geq 0.95$  Power Factor
- SMD 2835 LED Type
- $>80$  Colour Rendering
- $>UGR19$
- SDCM  $<5$
- Electrical Class I
- Tridonic/Vossloh Schwabe/Meanwell Driver
- Side cable entry
- 2.5 KV Surge Protection
- L90 B10 50 000hrs Rating
- 50 000hrs lifespan


### Design Specifications

- Polycarbonate Housing Body.
- Polycarbonate Lens Diffuser.
- White Housing Colour
- High uniformity ratio.
- Low glare ratio
- Flicker Free.

### Performance



### Dimensions

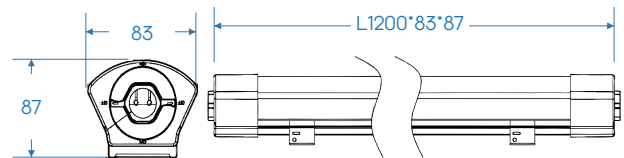

### Driver Specifications

Description	Specification
Input Current	Max 0.28A
Output Voltage	30-42VDC
Output Power	40W
Output Current mA	350mA-500mA

Model No.	Dimensions (mm)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
LAM00105	L1200*83*87	36W	160	4000K	$>80$	160°	19	$<5$



### Certifications



### Optional Features

- DALI Dimmable Options
- Microwave Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,  
Brentwood Park AH, Benoni.  
[info@lambdalumen.com](mailto:info@lambdalumen.com)  
Tel: +27 11 486 3552