



BACKLIT PANEL

26 watt LED area luminaire
IK03 | IP40 (Back) IP54 (Front) | 110° Beam Angle

Application

A solution for commercial, industrial, retail, educational, and Hospital areas.

Features

- 50/60Hz Frequency
- <15% Total Harmonic Distortions
- Electrical Class 1
- BOKE (Flicker free) Driver
- Back cable entry
- L80 B10 50 000hrs Rating
- 50 000hrs lifespan


Design Specifications

- Die-cast Aluminium Housing Body.
- Poly Methyl Methacrylate (PMMA) Lens Diffuser.
- White RAL9016 Housing Colour
- High uniformity ration.
- Optional mounting.
- Various sensor Options.
- Flicker Free.
- >1.5 KV Surge Protection


Performance



Dimensions

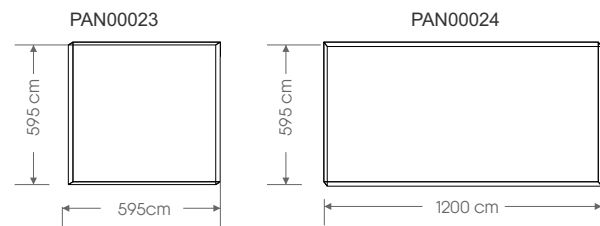

Photometric Data

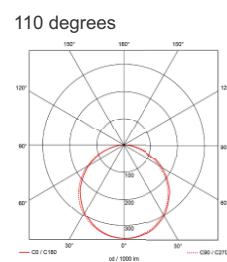

Driver

- Output: 30-40/42VDC
- Output Current: 0.6 - 1A
- Output Power: 40W Max

Technical Specifications

Model No.	Input (V)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
PAN00023	AC200-240V	26W	180	4000K	>80	110°	19	<2
PAN00024	AC200-240V	26W	180	5000K	>80	110°	19	<2

BACKLIT PANEL



Certifications




Optional Features

- 0-10V | DALI Dimmable Options
- PIR | Microwave Sensor Options.
- Emergency options are available on request.



Back Side of IP40

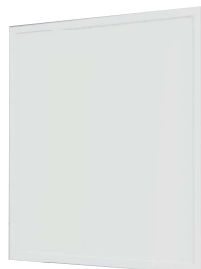

Front Side of IP54



Screwless Design



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 11 486 3552