



## NEXUS

22-40 watt LED area luminaire  
IP65 | 120° Beam Angle | Surface Mount

### Application


A solution for residential, commercial, retail, Industrial, Education and Hospitality areas.

### Features


- 50/60Hz Frequency
- 160lm/W Luminaire Efficacy
- 22W|28W|34W|40W Power Consumption
- AC220-240V Rated Voltage
- 3000k-4000k-6500k CCT
- $\geq 0.9$  Power Factor
- SMD 2835 LED Type
- Tridonic/Vossloh Schwabe/Meanwell Driver
- $\gt UGR22$
- $SDCM \leq 6$
- Electrical Class I
- $\gt 80$  Colour Rendering
- 1.5KV Surge Protection
- L80 B10 50 000hrs Rating
- 50 000hrs lifespan



### Dimensions

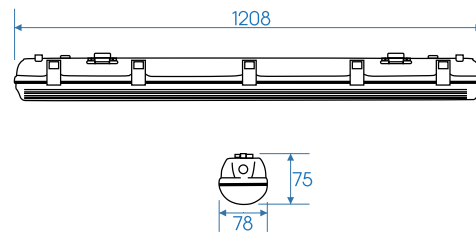

### Photometric Data

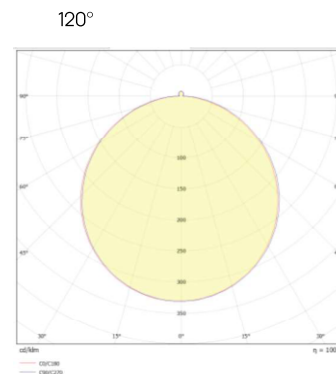

### Design Specifications

- Polycarbonate Housing Body.
- UV Resistant Polycarbonate Lens Diffuser.
- White Housing Colour
- Power Selectable
- Low glare ratio
- Surge Protection
- Flicker Free.

### Performance



### Technical Specifications

Model No.	Dimensions (mm)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
VP00031	L1208*W78*H75	40W	160	4000K	$\gt 80$	120°	22	$\leq 6$

## NEXUS



### Driver Specifications

- 60Vdc Output
- 46-54Vdc Output Current
- 40W Output power

### Certifications



### Optional Features

- Dimmable Options
- Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,  
Brentwood Park AH, Benoni.  
info@lambdalumen.com  
Tel: +27 10 500 9150