



## BACKLIT PANEL

26 watt LED area luminaire  
IK03 | IP40 (Back) IP54 (Front) | 110° Beam Angle

### Application

A solution for commercial, industrial, retail, educational, and Hospital areas.

### Features


- Rated Voltage: AC200-240V, 50/60Hz
- Total Harmonic Distortions: <15%
- Electrical Class I
- Driver Type: BOKE (Flicker free)
- Cable entry: Back
- L&B Rating: L80 B10 @50 000hrs
- Lifespan: 50 000hrs

### Design Specifications


- Die-cast Aluminium Housing.
- Poly Methyl Methacrylate (PMMA) Lens Diffuser.
- White RAL9016 Housing Colour
- >1.5 KV Surge Protection



### Dimensions

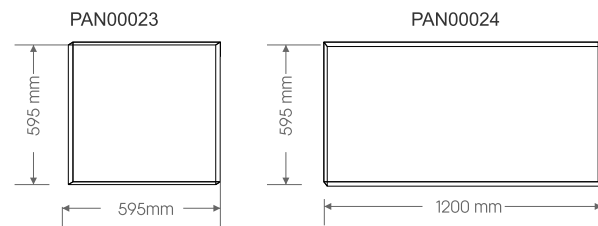

### Photometric Data



### Performance



### Driver

- Output: 30-40/42VDC
- Output Current: 0.6 - 1A
- Output Power: 40W Max

### Technical Specifications

Model No.	Input (V)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
PAN00023	AC200-240V	26W	180	4000K	>80	110°	19	<2
PAN00024	AC200-240V	26W	180	5000K	>80	110°	19	<2

## BACKLIT PANEL



### Certifications




### Optional Features

- 0-10V | DALI Dimmable Options.
- PIR | Microwave Sensor Options.
- Emergency options are available on request.



Back Side IP40



Front Side IP54



Screwless Design



Unit 21 & 22, Brentwood Office Park,  
Brentwood Park AH, Benoni.  
info@lambdalumen.com  
Tel: +27 10 500 9150