




OPTILINE T12

24 | 48 watt LED area luminaire
IP20 | 120° Beam Angle

Application

A solution for residential, commercial, retail, industrial, education and general areas.

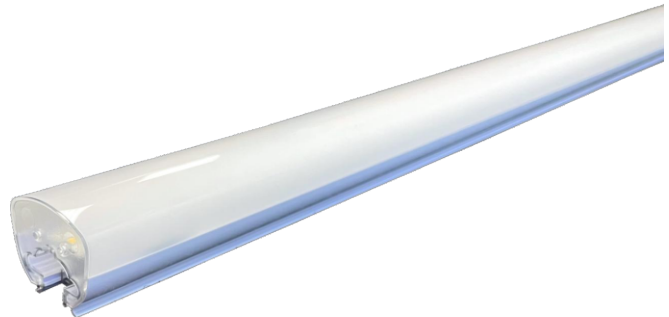

Features

- Input Voltage: AC220-240V, 50Hz
- Luminaire Efficacy: 170lm/W
- CCT: 3000K | 4000K | 5000K | 5700K
- Power Factor: ≥ 0.90
- Electrical Class I
- Beam Angle: 120° (Diffuser)
- Operating Temp: 0°C ~ 40°C
- Total Harmonic Distortions: $\leq 15\%$
- Colour Rendering Index: ≥ 80
- Lumen Maintenance: L80 B10 50 000hrs
- Operational lifespan: 50 000hrs

Design Specifications

- Material: Polycarbonate
- Enclosed External Driver
- Size: L 900mm x $\varnothing$ 40mm | L 1800mm x $\varnothing$ 40mm

Optional Accessories



- T-Piece
- 90° Band
- Cross Piece
- 45° Mounting Clips

Performance



Technical Specifications

Model No.	Dimensions (mm)	Power	Efficacy lm/W	CCT (K)	CRI	Beam Angle	Color
OL000156	L 1800mm x $\varnothing$ 40mm	48W	170lm/W	4000K	≥ 80	120°	White
OL000157	L 1800mm x $\varnothing$ 40mm	48W	170lm/W	5000K	≥ 80	120°	White
OL000158	L 900mm x $\varnothing$ 40mm	24W	170lm/W	4000K	≥ 80	120°	White
OL000159	L 900mm x $\varnothing$ 40mm	24W	170lm/W	5000K	≥ 80	120°	White

OPTILINE T



Certifications



Optional Features

- Dimmable Options.
- Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Business Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 10 500 9150