



BACKLIT PANEL

26 | 40 watt LED panel light
IK03 | IP40 (Back) IP54 (Front) | 110° Beam Angle

Application

A solution for commercial, industrial, retail, educational, and Hospital areas.

Features

- Rated Voltage: AC200-240V, 50/60Hz
- Total Harmonic Distortions: <15%
- Electrical Class I
- Driver Type: BOKE (Flicker free)
- Cable entry: Back
- Unified Glare Rate: UGR19
- L&B Rating: L80 B10 @50 000hrs
- Lifespan: 50 000hrs

Design Specifications

- Die-cast Aluminium Housing.
- Poly Methyl Methacrylate (PMMA) Lens Diffuser.
- White RAL9016 Housing Colour
- >1.5 KV Surge Protection

Performance



Driver


- Output: 30-40/42VDC
- Output Current: 0.6 - 1A
- Output Power: 40W Max

Technical Specifications


Model No.	Input (V)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SIZE
PAN00023	AC200-240V	26W	180	4000K	>80	110°	19	600*600mm
PAN00024	AC200-240V	26W	180	5000K	>80	110°	19	600*600mm
PAN00025	AC200-240V	40W	180	4000K	>80	110°	19	1200*600mm
PAN00026	AC200-240V	40W	180	5000K	>80	110°	19	1200*600mm



Dimensions

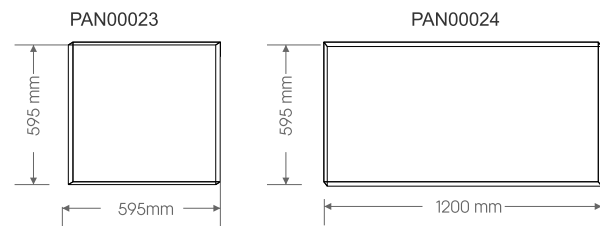

Photometric Data



BACKLIT PANEL



Certifications



Optional Features

- 0-10V | DALI Dimmable Options.
- PIR | Microwave Sensor Options.
- Emergency options are available on request.



Back Side IP40



Front Side IP54



Screwless Design



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 10 500 9150