



## LUMA TRACK SPOT

25, 35 watt LED area luminaire  
 IP20 | 15°, 24°, 36°, 60° Beam Angle | Recessed Mount

### Application


A solution for Commercial, Retail, Industrial, Education and Hospitality areas.

### Features

- 50/60Hz Frequency
- 120lm/W Luminaire Efficacy
- 25W|35W Power Consumption
- AC220-240V Rated Voltage
- 3000k-4000k-5000k CCT
- ≥0.9 Power Factor
- COB LED Type
- Tridonic/Vossloh Schwabe/Meanwell Driver
- >UGR19
- SDCM ≤3
- Electrical Class I
- 1KV Surge Protection
- L80 B10 50 000hrs Rating
- 50 000hrs lifespan
- Track Mount



### Dimensions

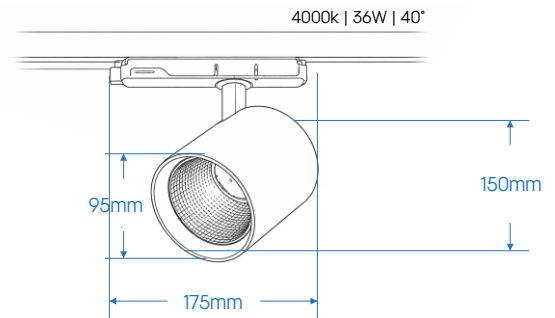

### Design Specifications

- Die Casting Aluminium Housing Body
- Tempered Glass Lens Diffuser.
- White | Black Housing Colour
- In track driver
- High uniformity ratio.
- Low glare ratio
- L80 B10 50 000hrs Rating

### Performance



Model No.	Dimensions (mm)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
LUM00103	Ø145*111	25W	120	4000K	>90	15°   24°   36°   60°	19	≤3
LUM00104	175*75*95	35W	120	4000K	>90	5°   24°   36°   60°	19	≤3

## LUMA TRACK SPOT



### Certifications



### Optional Features

- Triac | 0-10V | DALI Dimmable Options
- Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,  
Brentwood Park AH, Benoni.  
info@lambdalumen.com  
Tel: +27 11 486 3552