



RHINO PRO FLOODLIGHT

30-600 watt LED area luminaire
IP65 | 30°, 60°, 90°, 80°x140° Beam Angle |
Surface Mount

Application

A solution for commercial, retail, Industrial,
Education and Hospitality areas.

Features

- Rated Voltage: AC110-277V, 50/60Hz
- Luminaire Efficacy: 160 | 200lm/W
- CCT: 3000k-4000K-5000K-6000K
- Power Factor: ≥ 0.95
- Driver Type: SMD 3030
- Colour Rendering Index: >70 | >80
- Unified Glare Rating: $>UGR19$
- Colour Consistency: SDCM <4
- Electrical Class I
- DriverType: Tridonic/Vossloh Schwabe/Meanwell
- Cable entry: Bottom | 2"3/4" NPT
- Lumen Maintenance: L80 B10 50 000hrs
- Operational lifespan: 50 000hrs


Design Specifications

- Housing Body: ADC12 Aluminium.
- Lens Diffuser: UV Resistant Polycarbonate.
- Housing Colour: Black


Performance



Dimensions

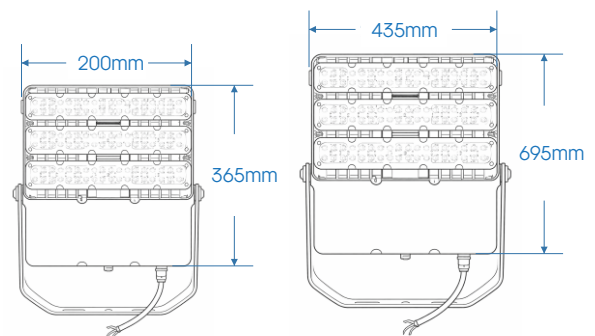


Photometric Data

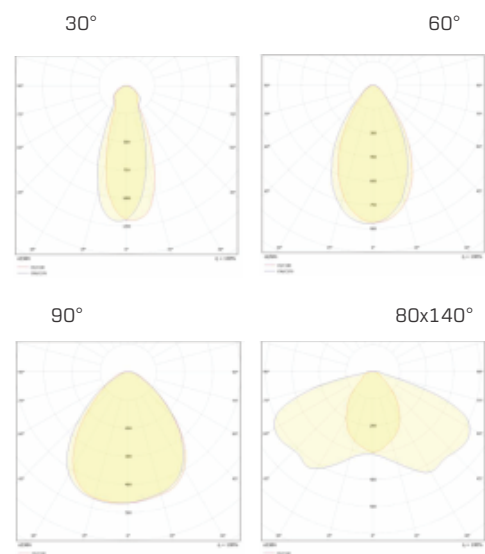


RHINO PRO FLOODLIGHT

30-600 watt LED area luminaire
IP65 | 30°, 60°, 90°, 80°x140° Beam Angle |
Surface Mount

Mounting Options

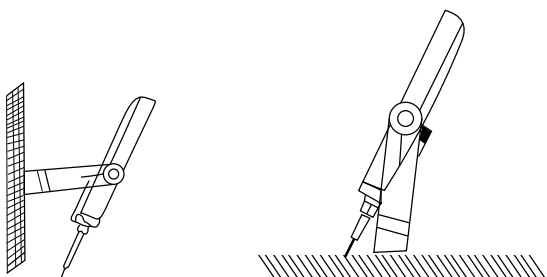

Wall Mount

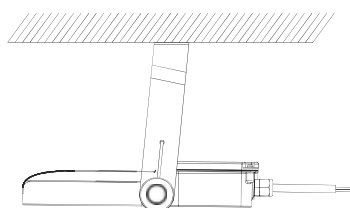

Ceiling/ Surface Mount

Versions



RHINO PRO FLOODLIGHT

30-600 watt LED area luminaire
IP65 | 30°, 60°, 90°, 80°x140° Beam Angle |
Surface Mount

Technical Specifications

Model No.	Dimensions (mm)	Power	Efficacy lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
FLR00080	346*200*65	50W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00081	365*310*60	100W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00082	365*365*60	150W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00083	365*420*60	200W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00084	365*420*60	250W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00085	695*385*65	300W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00086	695*435*65	400W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00087	695*435*65	500W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00088	695*435*65	600W	160	4000K	>70 >80	80°x140°	>19	<4
FLR00089	346*200*65	50W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00090	365*310*60	100W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00091	365*365*60	150W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00092	365*420*60	200W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00093	365*420*60	250W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00094	695*385*65	300W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00095	695*435*65	400W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00096	695*435*65	500W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00097	695*435*65	600W	160	5000K	>70 >80	80°x140°	>19	<4
FLR00370	346*200*65	50W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00371	365*310*60	100W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00372	365*365*60	150W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00373	365*420*60	200W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00374	365*420*60	250W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00375	695*435*65	300W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00376	695*435*65	400W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00377	695*435*65	500W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00378	695*435*65	600W	200	4000K	>70 >80	80°x140°	>19	<4
FLR00379	346*200*65	50W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00380	365*365*60	100W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00381	365*365*60	150W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00382	365*420*60	200W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00383	365*420*60	250W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00384	695*435*65	300W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00385	695*435*65	400W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00386	695*435*65	500W	200	5000K	>70 >80	80°x140°	>19	<4
FLR00387	695*435*65	600W	200	5000K	>70 >80	80°x140°	>19	<4

RHINO PRO FLOODLIGHT



Certifications



Optional Features

- Dimmable Options.
- Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 10 500 9150