



LAMONE BATTEN

36 watt LED area luminaire
IP65 | 160° Beam Angle | Surface, Suspended
and LinkableMount

Application

A solution for industrial, commercial, retail, and Hospitality areas.

Features

- Rated Voltage: AC100-265V @ 50\60Hz
- CCT: 3000K-4000K-5000K
- Power Factor: ≥ 0.95
- LED Type: SMD 2835
- Colour Rendering: >80
- Unified Glare Rate: >19
- Colour Consistency: SDCM <5
- Electrical Class I
- Driver: Tridonic/Vossloh Schwabe/Meanwell
- Cable entry: Side
- Surge Protection: 2.5 kV
- Lumen Maintenance: L80 B10 50 000hrs
- Operational lifespan: 50 000hrs


Design Specifications

- Housing Body: Polycarbonate .
- Diffuser: Polycarbonate Lens .
- Housing Colour: White

Performance



Dimensions

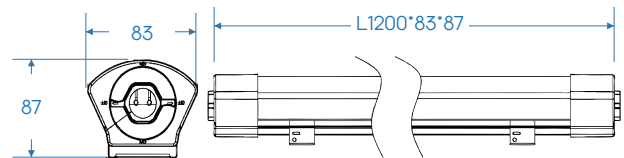

Driver Specifications

Description	Specification
Input Current	Max 0.28A
Output Voltage	30-42VDC
Output Power	40W
Output Current mA	350mA-500mA

Model No.	Dimensions (mm)	Power	Efficacy lm/W	CCT (K)	CRI	Beam Angle	UGR	SDCM
LAM00105	L1200*83*87	36W	160	4000K	>80	160°	>19	<5

LAMONE BATTEN



Certifications



Optional Features

- DALI Dimmable Options
- Microwave Sensor Options.
- Emergency options are available on request.



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 10 500 9150