



PRIMELINE LINEAR

30 | 60 watt LED area luminaire
IP20 | Track Mount

Application


A solution for interior, commercial, retail, and general areas.



Features

- Input Voltage: AC 220V -240V, 50/60Hz
- Operating Temperature: 0°C - 40°C
- Light output: (\pm 10%) 4500Lm | 9000Lm
- Beam Angle: 60° / Double Lobe
- True Seamless
- Flicker Factor
- L&B Rating: L80 B10 50 000hrs
- 9 Series connection
- Color Rendering Index: 80
- Internal driver supply system
- CCT3: 000K, 4000K, 5700K

Dimensions

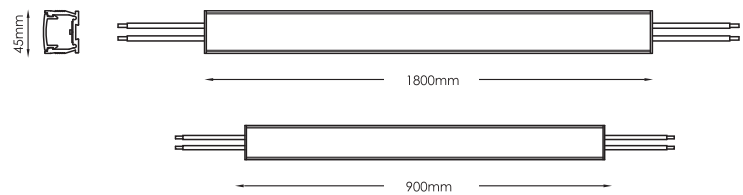

Design Specifications

- Material: Polycarbonate
- Housing Colour: White | Black
- High uniformity ratio.
- Optional mounting.
- Various sensor Options.
- \geq 0.95 Power Factor

Performance



Technical Specifications

Model No.	Input (v)	Power	Lumen lm/W	CCT (K)	CRI	Beam Angle	Color	Size
PL000160	AC200-240V	60W	150	4000K	>80	60°	White	1800x45mm
PL000161	AC200-240V	60W	150	5000K	>80	60°	Black	1800x45mm
PL000162	AC200-240V	60W	150	4000K	>80	Double Assy	White	1800x45mm
PL000163	AC200-240V	60W	150	5000K	>80	Double Assy	Black	1800x45mm
PL000164	AC200-240V	30W	150	4000K	>80	60°	White	900x45mm
PL000165	AC200-240V	30W	150	5000K	>80	60°	Black	900x45mm
PL000166	AC200-240V	30W	150	4000K	>80	Double Assy	White	900x45mm
PL000167	AC200-240V	30W	150	5000K	>80	Double Assy	Black	900x45mm

PRIMELINE LINEAR



Certifications



Optional Features

- 0-10V | DALI Dimmable Options
- PIR | Microwave Sensor Options.
- Emergency options are available on request.

Accessories

45/90 Mounting Clips



Track Mount Adapter



Unit 21 & 22, Brentwood Office Park,
Brentwood Park AH, Benoni.
info@lambdalumen.com
Tel: +27 10 500 9150